

PTFE密封垫片规格书

密封垫片

一、概述

本密封垫片采用优质PTFE材料制成，具有优异的耐腐蚀性、耐高温性和密封性能，广泛应用于化工、石油、制药等行业。

本密封垫片符合相关行业标准，质量可靠，性能稳定。

材料	PTFE
规格	20-100mm/厚度
颜色	PTFE 白色
包装	1000个/箱/1000个/箱
备注	1000个/箱/1000个/箱

二、产品特点

1. 耐腐蚀性
 - 对强酸、强碱、有机溶剂等具有优异的耐腐蚀性。
 - 适用于各种腐蚀性介质的密封。
 - 使用寿命长，维护成本低。
2. 耐高温性
 - 可在200℃以上的高温环境下长期使用。
 - 适用于高温工况的密封。
 - 性能稳定，不易老化。
3. 密封性好
 - 具有优异的密封性能，能有效防止介质泄漏。
 - 适用于各种密封要求的场合。

PRODUCT DESCRIPTION



PTFE



**Good
material**

+

**Real
factory**

=

**HIGH-QUALITY
PRODUCTS**



We used the **real PTFE material** without doping other fillers to give full play to the low friction characteristics of the PTFE raw material, so as to really help slippery.

We have more than **60 sets of molds** to cater to the needs of different furniture, and we can customize products of different specifications according to customer requirements




We use a slider pad in round 25mm, it's easy to lift a batch of **1.25L** of water due to its viscosity.



Arc design

**Professional arc design, effectively
sliding smaller potholes**

— Varied Specifications —

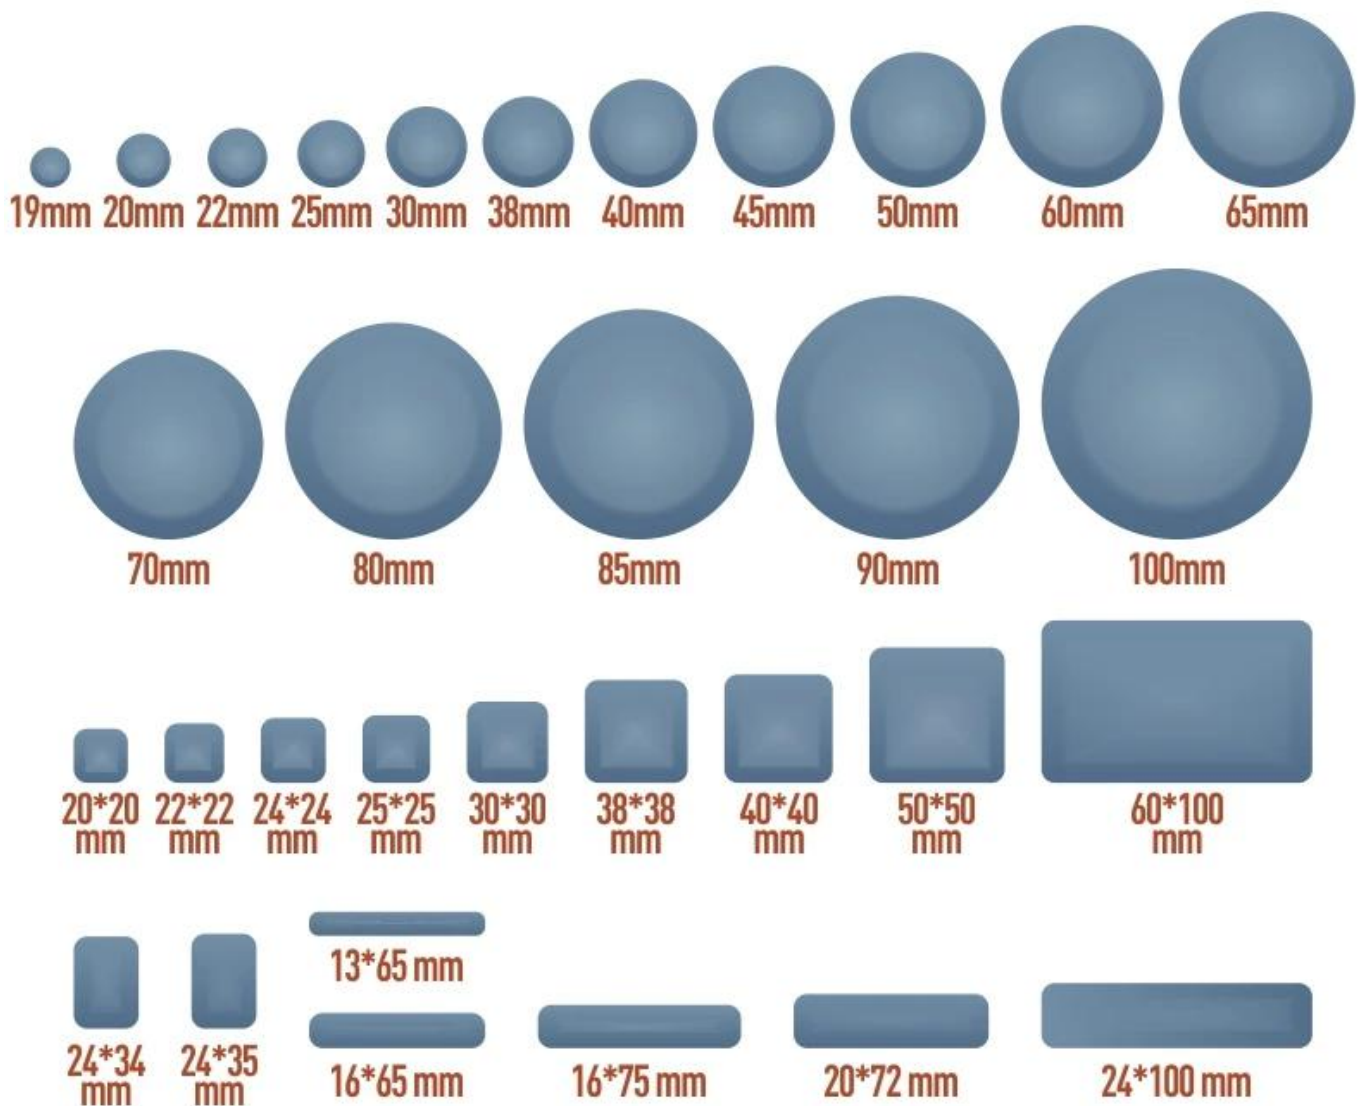

□□□□□□□□□□□□□□□□

— How to use —



Adhesive Pad

Peel off the release paper on the back and align it with a lamination press.



Nail Pad

Use tools to tap and fix.



Pad with screw

Use the tool to twist and install.



PRODUCT USE



Table



Chair



Sofa



Bed



Desk



Vase



Electrical
appliances



Cabinet

□□□□□



CONTACT INFORMATION

TEL : +80 20 34992808
+86 18026363923

Web : www.homecommoditysupplier.com

E-mail : sales02@balance-china.com

Address : No.2 Shengyuan Street, Beiliu Ind Park, Dagang Town,
Nansha District, Guangzhou, Guangdong, China

Zip code: 511470